


Masina de finisat umed pentru tencuieli si gleturi mecanizate



Echipament
fabricat in
Italia

Speedy

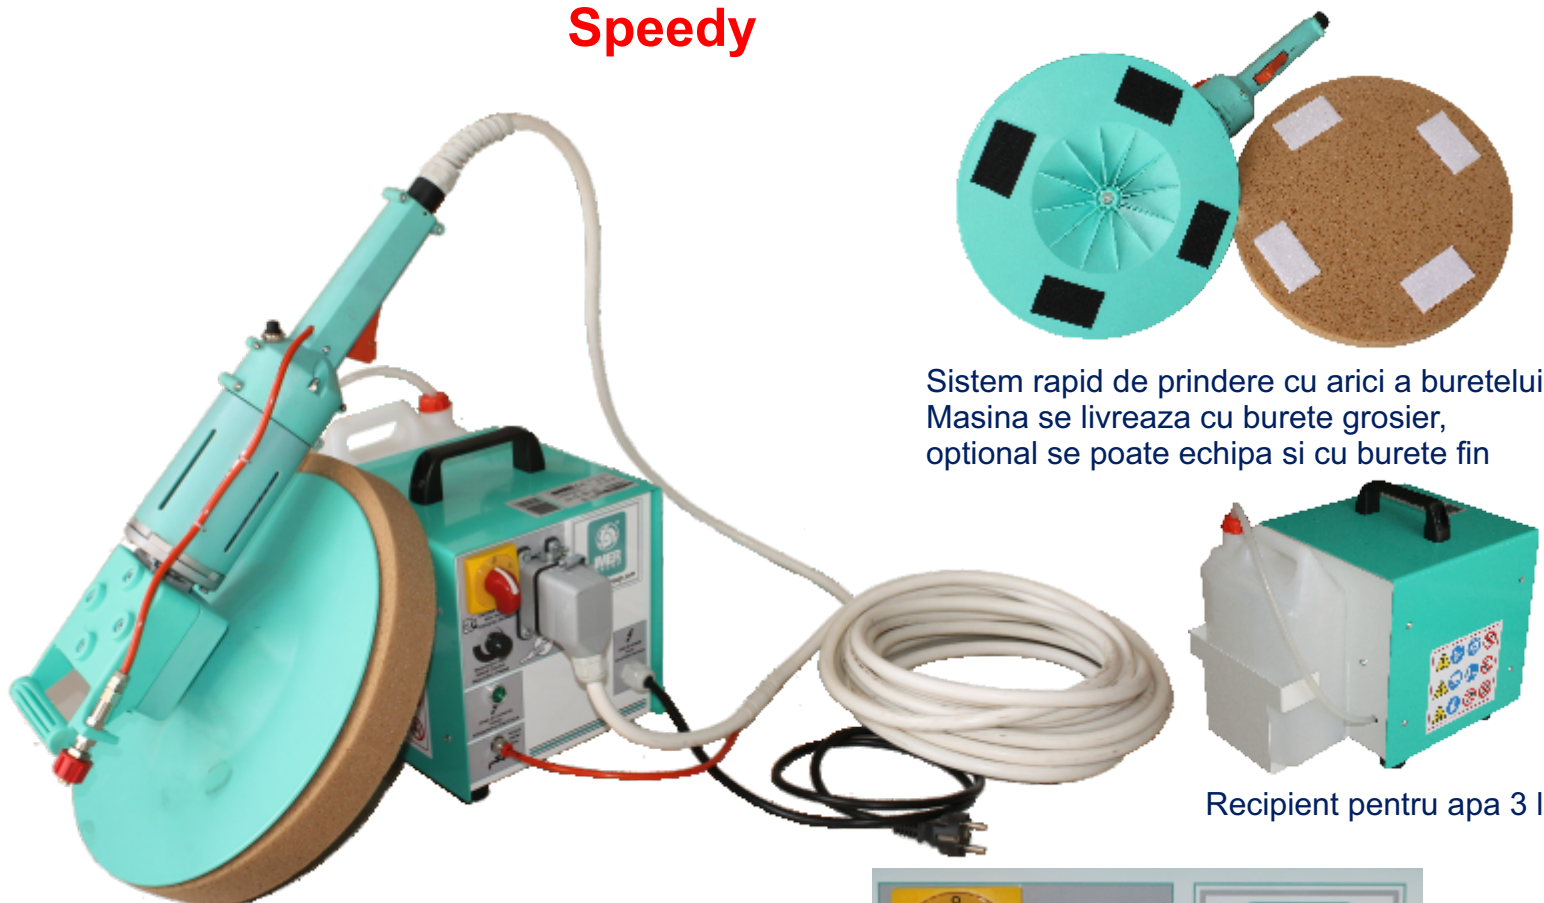

Sistem rapid de prindere cu arici a buretelui
Masina se livreaza cu burete grosier,
optional se poate echipa si cu burete fin

Recipient pentru apa 3 l

Masina de finisat umed	Speedy
Putere instalata	0.8 kW
Voltaj	230V - 50 Hz
Clasa izolare	1
Izolarea unitate	IP 44
Viteza rotatie disc	100 rpm
Diametru paleta slefuire	370 mm
Capacitate bidon apa	3 l
Temperatura de lucru	+ 5 +35°C
Umiditate relativa fara condens	5 - 90 %
Greutate slefuitor	6 kg
Greutate unitate	15 kg
Dimensiuni unitate LxIxH	300 x 300 x 360



Cutie pentru transport

Distribuitor local